


**Kember Kreative Floors** offers a premium **waterproof laminate floor** that combines the most innovative scratch, stain and water resistant finishes with premium styles and colors. Our superior waterproof laminate, combined with our industry-leading warranty truly raises the bar for cost effective, beautiful floor solutions.




## Color

<b>Oak</b>	Mountain	Cobble
Havana	Desert	Sandstone
Live OI	Glacier	Aspen
Charleston	Hamilton	Sun Bleached
Rocky	Ranch	Beach
Tiki	Washington	Nappa
Maddison	French Lace	Augusta
Charcoal	Pebble	
Pewter	Smoked	
Hearth	Sunrise	
Grey Rift	Homestead	
<b>Other</b>	Mission Walnut	Dry Cedar
	Cottage Wood	Customization

## Dimensions

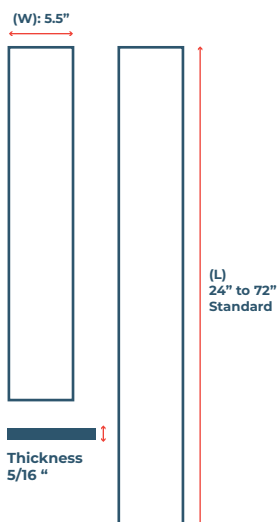

## Packaging


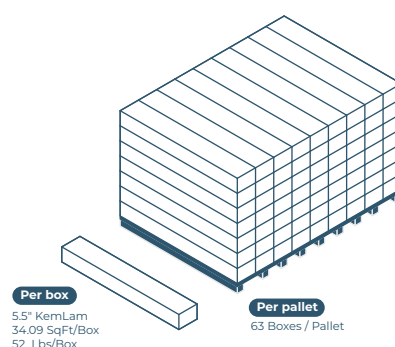


## Warranty

**50 YEAR FINISH WARRANTY**

Relative humidity must be maintained between **15% - 80%** or the warranty will be void.

## Accessories

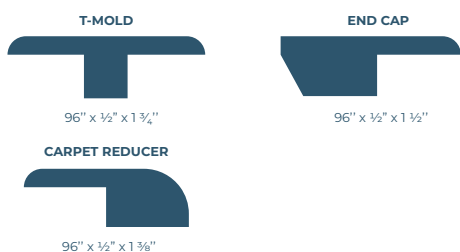

Specially equipped with the European-designed **KemLoc™ joint**. The **KemLoc™ joint system** uses a unique tongue-and-groove joint that is able to withstand the most extreme pressure. Simply by "clicking" the joints together, planks are held firmly in place.

## Specifications

<b>Subfloor</b>	Wood, concrete, or radiant heating system.
<b>Application Standards</b>	Coefficient of Static Friction (ASTM-D2047): 0.44-0.54 spread result
<b>LEED Credits</b>	No added urea-formaldehyde
<b>Swell Rate</b>	Less than 6% on 72 hour soak test
<b>Installation</b>	Floating or glued down

## Application



Residential /  
Rental

**STAIR TREADS**, 48" to 96"L x 12"D.

**STAIR NOSING**, 96"L x 5.5"D.



Light  
Commercial



Office

## Maintenance



Use rugs in high traffic areas to prevent early signs of wear. Use rugs with mesh backings, to prevent humidity from being trapped underneath.



Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching. Replace pads often.



Use only large, rubber or polyurethane castors. Plastic castors may damage your floor.



To protect the floor when moving heavy furniture, place a piece of plywood on top of a rug to slide it to its new location.



Trim your pet's claws often.



Use curtains or blinds to aid in the UV protection of your flooring.



Maintain relative humidity between 15% and 80%. High humidity causes buckling, and low humidity causes gapping around the perimeter.

## Cautions

Never use wax, oil-based, or other household cleaning detergents on your floors. Do not wear high heels and cleats.

## Cleaning



Kember Kreative Floors™ recommends the "Bona Hardwood Floor Care System" for cleaning

Sweep or vacuum floors to eliminate abrasive dust and dirt

Mist floor with Bona hardwood floor cleaner

Clean using the cleaning pad

Rinse cleaning pad as necessary, to avoid streaking

**KEMBER ECOKLIK™ engineered hardwood** delivers the look of solid wood floor, the performance of an engineered product and **the ease of installation of a laminate click**. **ECOKLIK™** is single strip, “random length”, just like a solid wood floor.



## Janka Test

<b>Maple</b> 1450lbs	<b>Red Oak</b> 1290lbs	<b>White Oak</b> 1360lbs	<b>Walnut</b> 1010lbs
-------------------------	---------------------------	-----------------------------	--------------------------

## Color

<b>Oak</b>	White Oak Natural	Pewter
	Armory	Graphite
	Chalk Canvas	Light Grey
	Snowmass	Cobble
	Rift Pearl	Almond Oak (225E)
	NY Grey	French White
	Albany	

<b>Maple</b>	AE Brown
	Smoked

<b>Walnut</b>	Natural
---------------	---------

<b>Other</b>	Customization
--------------	---------------

## Accessories




## Warranty


### 50 YEAR FINISH WARRANTY

Relative humidity must be maintained between **15% - 65%** or the warranty will be void.

## Dimensions

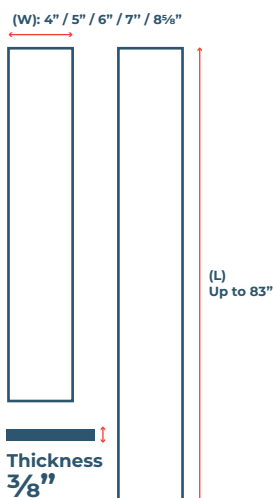

## Packaging




	Per box	Per pallet
<b>4" EcoKlik</b>	36.53SqFt/Box 59lbs/Box Box: 84"x7"x4"	36.5360 boxes/Pallet Pallet: 7' x 4' x 4'
<b>5" EcoKlik</b>	33.91SqFt/Box 55lbs/Box Box: 84" X 11" X 3"	56 boxes/Pallet Pallet: 7' x 4' x 4'
<b>6" EcoKlik</b>	27.56SqFt/Box 46lbs/Box Box: 84" X 7" X 4"	60 boxes/Pallet Pallet: 7' x 4' x 4'

## Specifications

<b>Finishes</b>	Semi-Gloss – 30%, Matte - 10%, Extreme Matte – 4-7%
<b>Subfloor</b>	Wood, concrete, or radiant heating system.
<b>Application Standards</b>	Surface Burning (ASTM E-84): FSI (Flame Spread Index) 100-150 Class C (depends on wood species) SD (Smoke Development) 75-400 (depends on wood species) Surface Burning (ULC-S-102-2): FSV (Flame Spread Value) 100-150 (depends on wood species) SD (Smoke Development) 200-300 (depends on wood species) Critical Radiant Flux (ASTM-E-648-94a): 0.25 to 0.40 watt/cm <sup>2</sup> (depends on wood species) R Value: R 0.3 to 0.4 (depends on wood species)
<b>LEED Credits</b>	MRC4 Kember EcoKlik™ is composed of 82% Post Industrial recycled content iEQc4.3 Kember EcoKlik™ is FloorScore certified

## Installation

Floating or glued down



Specially equipped with the European-designed **KemLoc™ joint**. The **KemLoc™ joint system** uses a unique tongue-and-groove joint that is able to withstand the most extreme pressure. Simply by “clicking” the joints together, planks are held firmly in place.



## Application



Residential /  
Rental



Light  
Commercial



Office

FACTORY PRE-FINISHED STAIR TREADS, 48" to 96"L x 12"D.

FACTORY PRE-FINISHED STAIR NOSING

## Maintenance



Use rugs in high traffic areas to prevent early signs of wear. Use rugs with mesh backings, to prevent humidity from being trapped underneath.



Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching. Replace pads often.



Use only large, rubber or polyurethane castors. Plastic castors may damage your floor.



To protect the floor when moving heavy furniture, place a piece of plywood on top of a rug to slide it to its new location.



Trim your pet's claws often.



Use curtains or blinds to aid in the UV protection of your flooring.



Maintain relative humidity between 15% and 65%. High humidity causes buckling, and low humidity causes gapping around the perimeter.

## Cautions

Never wet mop wood floors.

Change the temperature of a subfloor radiant heat system by less than 5F (2.8C) per day when switching the system on and off.

Do not use wax, oil-based, or other household cleaning detergents on your floors. Do not wear high heels and cleats.

## Cleaning



Kember Kreative Floors™ recommends the "Bona Hardwood Floor Care System" for cleaning

Sweep or vacuum floors to eliminate abrasive dust and dirt

Mist floor with Bona hardwood floor cleaner

Clean using the cleaning pad

Rinse cleaning pad as necessary, to avoid streaking