


**E3plank™** is installed the same as 3/4" traditional solid floors with a nailed-down install, however **E3plank™** reduces the amount of minor gapping between planks during seasonal changes resulting in a more stable installed floor. **E3plank™** is produced in "random lengths", just like a solid wood floor.

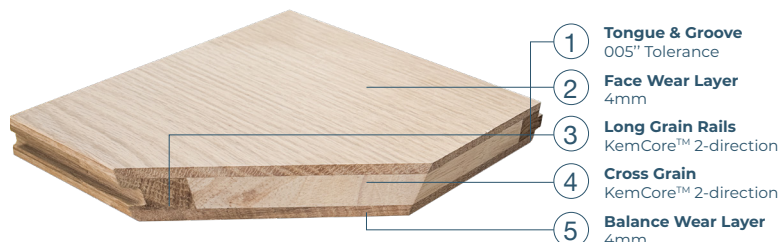

## Species & Related Hardness

<b>Maple</b> 1450lbs	<b>Red Oak</b> 1290lbs	<b>White Oak</b> 1360lbs	<b>Walnut</b> 1010lbs
-------------------------	---------------------------	-----------------------------	--------------------------

## Color

<b>Oak</b>	<b>Naked Oak</b>	<b>Barn Oak</b>
	<b>Pure Oak</b>	<b>Burnt Copper Oak</b>
	<b>French Vanilla</b>	
	<b>Pale Cream</b>	
	<b>Mocha Cream</b>	
	<b>Burnished Bronze Oak</b>	
	<b>Tawny Oak</b>	


<b>Maple</b>	<b>AE Brown</b>	<b>Graphite</b>
	<b>Smoked</b>	<b>Harvest</b>

<b>Walnut</b>	<b>Natural</b>
---------------	----------------

<b>Other</b>	<b>Customization</b>
--------------	----------------------

## Dimensions

(W): 4 / 5 / 6 / 7 / 8 / 9 / 10 "

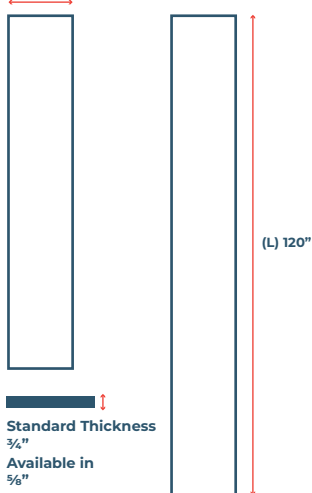

## Packaging

CUSTOM SIZE ARE AVAILABLE



	Per box	Per pallet
<b>4" E3plank</b>	13.135SqFt/Box 37lbs/Box Box: 84" X 11" X 3"	36.5360 boxes/Pallet Pallet: 7' x 4' x 4'
<b>5" E3plank</b>	26.365SqFt/Box 45lbs/Box Box: 84" X 11" X 3"	56 boxes/Pallet Pallet: 7' x 4' x 4'
<b>6" E3plank</b>	19.705SqFt/Box 55lbs/Box Box: 84" X 7" X 4"	60 boxes/Pallet Pallet: 7' x 4' x 4'
<b>7" E3plank</b>	17.225SqFt/Box 48lbs/Box Box: 84" X 7" X 4"	60 boxes/Pallet Pallet: 7' x 4' x 4'
<b>8" E3plank</b>	19.705SqFt/Box 55lbs/Box Box: 84" X 7" X 4"	60 boxes/Pallet Pallet: 7' x 4' x 4'
<b>9" E3plank</b>	22.175SqFt/Box 62lbs/Box Box: 84" X 7" X 4"	60 boxes/Pallet Pallet: 7' x 4' x 4'
<b>10" E3plank</b>	24.655SqFt/Box 69lbs/Box Box: 84" X 7" X 4"	60 boxes/Pallet Pallet: 7' x 4' x 4'

## Specifications

<b>Finishes</b>	Semi-Gloss – 30%, Matte – 10%, Extreme Matte – 4-7%
<b>Subfloor</b>	Wood, concrete with or without a radiant heating system.
<b>Application Standards</b>	Surface Burning (ASTM E-84): FSI (Flame Spread Index) 100-150 Class C (depends on wood species) SD (Smoke Development) 75-400 (depends on wood species)  Surface Burning (ULC-S-102-2): FSV (Flame Spread Value) 100-150 (depends on wood species) SD (Smoke Development) 200-300 (depends on wood species)  Critical Radiant Flux (ASTM-E-648-94a): 0.25 to 0.40 watt/cm² (depends on wood species)  R Value: R 0.3 to 0.4 (depends on wood species)
<b>LEED Credits</b>	MRc4 Within 500 miles (depends on site location)  IEQc4.3 <b>E3plank™</b> is FloorScore certified

## Side Profile

**Solid Stairs Nosing**



**Solid Stairs Tread**



## Installation

Nailed or glued down

## Warranty

**50 YEAR FINISH WARRANTY**

Relative humidity must be maintained between **15% - 65%** or the warranty will be void.

## Application



Residential /  
Rental



Light  
Commercial



Office

**FACTORY PRE-FINISHED STAIR TREADS AND NOSINGS, KEMBER KREATIVE FLOORS™** offers stair treads custom-produced in your dimensions, stained and finished to match your new KEMBER EPLANK™ wood flooring.

## Maintenance



Use rugs in high traffic areas to prevent early signs of wear. Use rugs with mesh backings, to prevent humidity from being trapped underneath.



Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching. Replace pads often.



Use only large, rubber or polyurethane castors. Plastic castors may damage your floor.



To protect the floor when moving heavy furniture, place a piece of plywood on top of a rug to slide it to its new location.



Trim your pet's claws often.



Use curtains or blinds to aid in the UV protection of your flooring.



Maintain relative humidity between 15% and 65%. High humidity causes buckling, and low humidity causes gapping around the perimeter.

## Cautions

Never wet mop wood floors.

Change the temperature of a subfloor radiant heat system by less than 5F (2.8C) per day when switching the system on and off.

Do not use wax, oil-based, or other household cleaning detergents on your floors. Do not wear high heels and cleats.

## Cleaning



Kember Kreative Floors™ recommends the “Bona Hardwood Floor Care System” for cleaning

Sweep or vacuum floors to eliminate abrasive dust and dirt

Mist floor with Bona hardwood floor cleaner

Clean using the cleaning pad

Rinse cleaning pad as necessary, to avoid streaking