

E3PLANK™
FLOORING



E3plank™ Re-engineered Hardwood Flooring

Premium American lumber with European finish

Offering the elegance of unique wide-plank, custom-made engineered wood floors that combine solid made-in-America quality with exquisite European finishing techniques


E3plank™ is installed the same as 3/4" traditional solid floors with a nailed-down install, however E3plank™ reduces the amount of minor gapping between planks during seasonal changes resulting in a more stable installed floor.

E3plank™ is produced in "random lengths", just like a solid wood floor.



Dimensions

(W): 4 / 5 / 6 / 7 / 8 / 9 / 10"

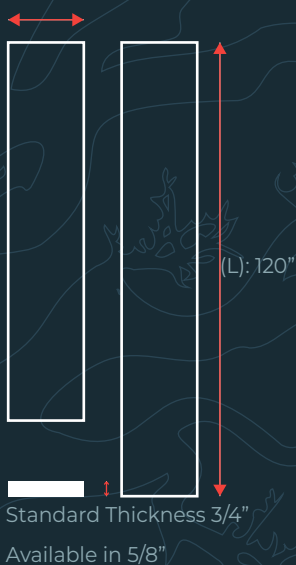

Standard Thickness 3/4"
Available in 5/8"

Specifications

Finish	Semi-Gloss-30%T, Matte-10%, Extreme Matte- 4-7%
Subfloor	Wood, concrete with or without a radiant heating system
Application	Surface Burning (ASTM E-84):
Standards	FSI (Flame Spread Index) 100-150 Class C (depends on wood species) SD (Smoke Development) 75-400 (depends on wood species)
	Surface Burning (ULC-S-102-2): FSV (Flame Spread Value) 100-150 (depends on wood species) SD (Smoke Development) 200-300 (depends on wood species)
	Critical Radiant Flux (ASTM-E648-94a): 0.25 to 0.40 watt/cm ² (depends on wood species)

LEED Credits MRc4 Within 500 miles (depends on site location)

iEQc4.3 E3planks™ is FloorScore certified

Warranty

50-YEAR FINISH WARRANTY

Relative humidity must be maintained between 25% - 50% or the warranty will be void

Installation

Nailed or glued down

Application

With a wide range of finishes and colors, E3plank™ is perfect for residential and commercial projects, offering a sophisticated and timeless appeal. Whether you're designing modern interiors or classic spaces, our engineered wood flooring provides the perfect balance of style and function.

Residential/ Rental
Light Commercial
Office

Maintenance



Use rugs in high traffic areas to prevent early signs of wear. Use rugs with mesh backings, to prevent humidity from being trapped underneath.



Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching. Replace pads often.



Use only large, rubber or polyurethane castors. Plastic castors may damage your floor.



To protect the floor when moving heavy furniture, place a piece of plywood on top of a rug to slide it to its new location.



Trim your pet's claws often.



Use curtains or blinds to aid in the UV protection of your flooring.



Maintain relative humidity between 15% and 65%. High humidity causes buckling, and low humidity causes gapping around the perimeter.

Cautions

Never wet mop wood floors.

Change the temperature of a subfloor radiant heat system by less than 5F (2.8C) per day when switching the system on and off.

Do not use wax, oiled-based, or other household cleaning detergents on your floors.

Do not wear high heels and cleats.

Grain Selections

Crafted with precision, E3plank™ features a balanced 3-Ply construction with our proprietary 2 directional core center that brings unsurpassed stability, minimizing expansion and contraction due to temperature and humidity changes. The top layer is made from premium American oak, carefully selected for its rich grain patterns and durability.



Select Rift & Quartered




Select Livesawn



Character

**Northern Oak
Premium
Collection**

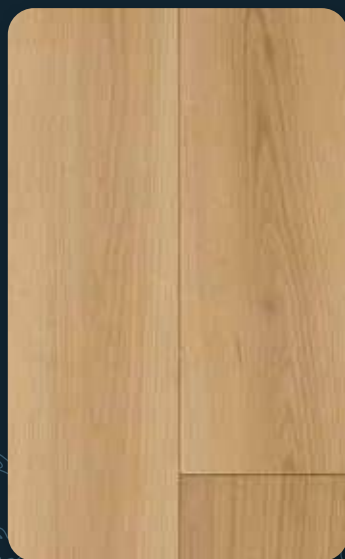

NAKED OAK



FRENCH VANILLA



PALE CREAM



MOCHA CREAM



FRENCH WHITE




PURE OAK

**Northern Oak
Premium
Collection**



TAILOR CREAM

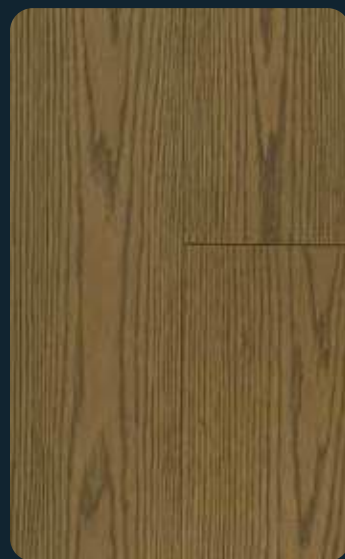

TAILOR TAUPE



TAWNY OAK



BARN OAK



BURNISHED BRONZE

Shou Sugi Ban Collection

Blending choice
American Oak
with timeless
Japanese tradition



WAKA OAK



YAKETA OAK



GINIRO OAK



CHAIRO OAK



MIDORI OAK



MINORI OAK



BARREL OAK



ARISAKA OAK



YOKO OAK



KURO OAK

**Northern Oak
Restoration
Collection**



ARMORY OAK



LAMBERT OAK



DANBURY OAK



CITADEL OAK



TANNERS OAK



DOVER OAK



POST OAK



WINDSOR OAK



WINSTON OAK