


E3plank™ is an engineered three ply solid hardwood flooring. Our world-class technology combines the best of both worlds, with the same feel of traditional solid and the stability of an engineered product. **E3plank™** is produced in "random lengths", just like a solid wood floor. It can be nailed or glued down.

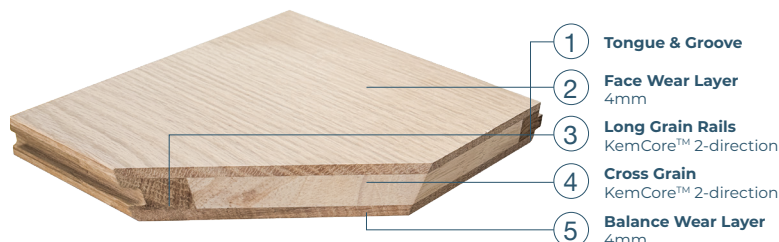

Species & Related Hardness

Maple 1450lbs	Red Oak 1290lbs	White Oak 1360lbs	Walnut 1010lbs
-------------------------	---------------------------	-----------------------------	--------------------------

Color

Oak	Naked Oak	Barn Oak
	Pure Oak	Burnished Bronze Oak
	French Vanilla	Tawny Oak
	Pale Cream	
	Mocha Cream	
	Tailor Cream	
	Tailor Taupe	


Maple	AE Brown	Graphite
	Smoked	Harvest

Walnut	Natural
---------------	----------------


Specifications

Finishes	Semi-Gloss – 30%, Matte - 10%, Extreme Matte – 4-7%
Subfloor	Wood, concrete with or without a radiant heating system
Application Standards	Surface Burning (ASTM E-84): FSI (Flame Spread Index) 100-150 Class C (depends on wood species) SD (Smoke Development) 75-400 (depends on wood species) Surface Burning (ULC-S-102-2): FSV (Flame Spread Value) 100-150 (depends on wood species) SD (Smoke Development) 200-300 (depends on wood species) Critical Radiant Flux (ASTM-E-648-94a): 0.25 to 0.40 watt/cm² (depends on wood species) R Value: R 0.3 to 0.4 (depends on wood species)
LEED Credits	MRc4 Within 500 miles (depends on site location) iEQc4.3 E3plank™ is FloorScore certified

Dimensions

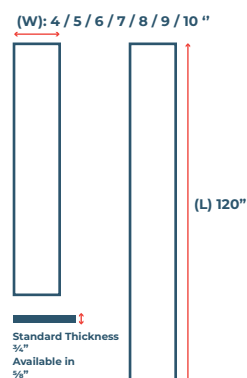

Side Profile



Installation

Nailed or glued down

Warranty

50 YEAR FINISH WARRANTY

Relative humidity maintained between **25% - 50%** or the warranty will be void.

Application



Residential /
Rental




Light
Commercial



Office

FACTORY PRE-FINISHED STAIR TREADS AND NOSINGS, KEMBER KREATIVE FLOORS™ offers stair treads custom-produced in your dimensions, stained and finished to match your new KEMBER EPLANK™ wood flooring.

Maintenance



Use rugs in high traffic areas to prevent early signs of wear. Use rugs with mesh backings, to prevent humidity from being trapped underneath.



Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching. Replace pads often.



Use only large, rubber or polyurethane castors. Plastic castors may damage your floor.



To protect the floor when moving heavy furniture, place a piece of plywood on top of a rug to slide it to its new location.



Trim your pet's claws often.



Use curtains or blinds to aid in the UV protection of your flooring.



Maintain relative humidity between 25% and 50%. High around the perimeter.

Cautions

Never wet mop wood floors.

Change the temperature of a subfloor radiant heat system by less than 5F (2.8C) per day when switching the system on and off.

Do not use wax, oil-based, or other household cleaning detergents on your floors. Do not wear high heels and cleats.

Cleaning



Kember Kreative Floors™ recommends the “Bona Hardwood Floor Care System” for cleaning

Sweep or vacuum floors to eliminate abrasive dust and dirt

Mist floor with Bona hardwood floor cleaner

Clean using the cleaning pad

Rinse cleaning pad as necessary, to avoid streaking