

KEMBER ECOKLIK™ engineered hardwood delivers the look of solid wood floor, the performance of an engineered product and **the ease of installation of a laminate click.** **ECOCLIK™** is single strip, “random length”, just like a solid wood floor.



Janka Test

Maple 1450lbs	Red Oak 1290lbs	White Oak 1360lbs	Walnut 1010lbs
-------------------------	---------------------------	-----------------------------	--------------------------

Color

Oak	White Oak Natural	Pewter
	Armory	Graphite
	Chalk Canvas	Light Grey
	Snowmass	Cobble
	Rift Pearl	Almond Oak (225E)
	NY Grey	French White
	Albany	

Maple	AE Brown
	Smoked

Walnut	Natural
---------------	---------

Other	Customization
--------------	---------------

Accessories




Warranty


50 YEAR FINISH WARRANTY

Relative humidity must be maintained between **15% - 65%** or the warranty will be void.

Dimensions

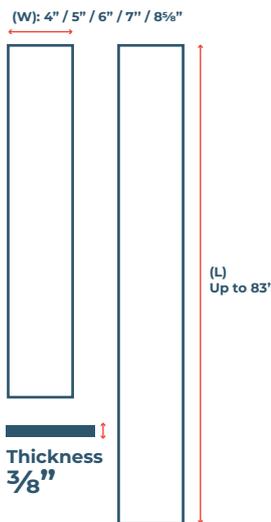

Packaging

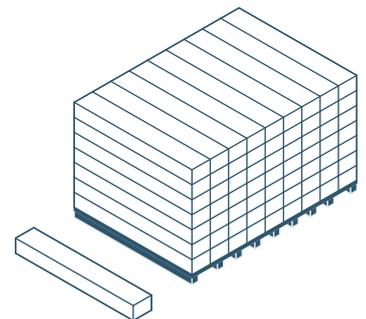


	Per box	Per pallet
4" EcoKlik	36.53SqFt/Box 59lbs/Box Box: 84"x7"x4"	36.5360 boxes/Pallet Pallet: 7' x 4' x 4'
5" EcoKlik	33.91SqFt/Box 55lbs/Box Box: 84" X 11" X 3"	56 boxes/Pallet Pallet: 7' x 4' x 4'
6" EcoKlik	27.56SqFt/Box 46lbs/Box Box: 84" X 7" X 4"	60 boxes/Pallet Pallet: 7' x 4' x 4'

Specifications

Finishes	Semi-Gloss – 30%, Matte - 10%, Extreme Matte – 4-7%
Subfloor	Wood, concrete, or radiant heating system.
Application Standards	Surface Burning (ASTM E-84): FSI (Flame Spread Index) 100-150 Class C (depends on wood species) SD (Smoke Development) 75-400 (depends on wood species) Surface Burning (ULC-S-102-2): FSV (Flame Spread Value) 100-150 (depends on wood species) SD (Smoke Development) 200-300 (depends on wood species) Critical Radiant Flux (ASTM-E-648-94a): 0.25 to 0.40 watt/cm ² (depends on wood species) R Value: R 0.3 to 0.4 (depends on wood species)
LEED Credits	MRC4 Kember EcoKlik™ is composed of 82% Post Industrial recycled content IEQc4.3 Kember EcoKlik™ is FloorScore certified

Installation

Floating or glued down



Specially equipped with the European-designed **KemLoc™ joint**. The **KemLoc™ joint system** uses a unique tongue-and-groove joint that is able to withstand the most extreme pressure. Simply by “clicking” the joints together, planks are held firmly in place.

Application



Residential /
Rental



Light
Commercial



Office

FACTORY PRE-FINISHED STAIR TREADS, 48" to 96"L x
12"D.

FACTORY PRE-FINISHED STAIR NOSING

Maintenance



Use rugs in high traffic areas to prevent early signs of wear. Use rugs with mesh backings, to prevent humidity from being trapped underneath.



Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching. Replace pads often.



Use only large, rubber or polyurethane castors. Plastic castors may damage your floor.



To protect the floor when moving heavy furniture, place a piece of plywood on top of a rug to slide it to its new location.



Trim your pet's claws often.



Use curtains or blinds to aid in the UV protection of your flooring.



Maintain relative humidity between 15% and 65%. High humidity causes buckling, and low humidity causes gapping around the perimeter.

Cautions

Never wet mop wood floors.

Change the temperature of a subfloor radiant heat system by less than 5F (2.8C) per day when switching the system on and off.

Do not use wax, oil-based, or other household cleaning detergents on your floors. Do not wear high heels and cleats.

Cleaning



Kember Kreative Floors™ recommends the "Bona Hardwood Floor Care System" for cleaning

Sweep or vacuum floors to eliminate abrasive dust and dirt

Mist floor with Bona hardwood floor cleaner

Clean using the cleaning pad

Rinse cleaning pad as necessary, to avoid streaking