


Engineered Hardwood Door

Northern Oak, Rife or Livesawn with Matching Wood Frame

Specification

Door Thickness	1 3/8 or 1 3/4"
Surface	4mm Oak Veneer on Each Side
Core	1 3/8" Hardwood
Finish	Polyurethane Coating
Door Frame	1 1/8" Hardwood
Fire rating	20 minutes UL(C) 9NFPA252
Acoustic rating	STC32"
Formaldehyde Emissions	No Added Urea Formaldehyde (NAUF)

Construction

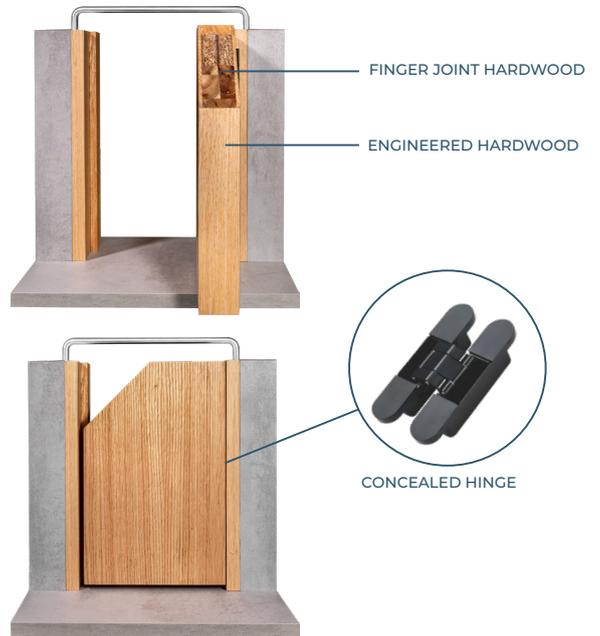

Slab Door Styles



Vertical Grain Fluted Combined Grain Flat Panel

Shaker Door Styles



Single Fluted Shaker Horizontal Double-Shaker Vertical Double-Shaker 3-Panel Shaker 4-Panel Shaker

Slab doors are available as flat panel or fluted.
The grain direction can be vertical, horizontal or combined.

All shaker doors can be made as flat-panel style or fluted and with or without glass. Shaker panels can be vertical or horizontal grain.

Specifications

Door Structure	1 3/8" Thick Melamine Laminate, Solid Core with 4" Hardwood Frame
Door Frame	1 1/8" Thick Hardwood Frame, Melamine Face
Casing	Melamine L-Shaped Casing Dadoed into Door Frame
Fire Rating	Optional: 20 Minute UL(C) 9NFPA252
Acoustical Rating	Up to 32 STC

Construction



Flat Panel



Fluted



Diagonal Fluted



Single Shaker



Vertical Double Shaker



Horizontal Double Shaker



Three Panel Shaker



Four Panel Shaker

All shaker doors can be made as flat-panel style or fluted and with or without glass. Shaker panels can be vertical or horizontal grain.

Engineered Hardwood



Burnished
Bronze Oak



Tawny Oak



Pure Oak



French Vanilla Oak



Pale Cream



Naked Oak



French Vanilla
Oak



Mocha Cream
Oak



Burnt Copper
Oak



Barn Oak



Bronze Oak



Dark Brown

Laminated door



MS 492 SC07



MS 493 SC07



MS 475



MS 475

Lacquered Laminate door



Lacquered Laminate 1



Lacquered Laminate 1



Lacquered Laminate 2



Lacquered Laminate 2