



KEMBER KREATIVE FLOORS™ has created a premium hard surface floor with a waterproof limestone core and a vinyl protective layer while maintaining an authentic wood look. KEMBER KEMLAM™ LIMESTONE CORE is superior to other laminate and LVT products because it is: WATERPROOF, DIMENSIONALLY STABLE (not affected by temperature or humidity) and DENT RESISTANT (due to high density core).

Colors		Oak – Antique, Aspen, Beach, Charcoal, Cobble, Denali, Desert, Everest, French Lace, French White, Glacier, Graphite, Grey Rift, Harvest, Mountain, Nordic, Pewter, Rainer, Ranch, Saddle, Sandstone, Slate, Smokey Mountain, Soho Grey, Sun Bleached, Timber Wolf, Toffee Other – Amber Hickory, Cottage Wood, Dry Cedar, & Walnut Custom colors are also available.			
Subfloor		Wood, concrete, or radiant heating systems.			
Packaging		7" KemLam Limestone Core 14.18 SqFt/Box (4') 17.73 SqFt/Box (6') 30 lbs/Box (4'), 38lbs/Box (6') 70 Boxes/Pallet		5.5" KemLam Limestone Core 11.04 SqFt/Box (4') 13.80 SqFt/Box (6') 23 lbs/Box (4'), 29 lbs/Box(6') 70 Boxes/Pallet	
Application Standards		Coefficient of Static Friction (ASTM-D2047): >0.55 wet/dry			
Acoustical Results with 5mm Kember Silencer		8" Concrete	18" Web Truss	12" TJI	2" x 10" Solid Timber
		IIC 57	IIC 55	IIC 54	IIC 52
LEED Credits	iEQc4.3	FloorScore certified			
	iEQc4.4	NO added Urea Formaldehyde			

## Specifications:

Lengths: 48", 72"

Width: 5.5", 7"

Thickness: 1/4"

Wearlayer: 20 mil vinyl with UV cured urethane

Warranty: 50 Year Finish Warranty

Installation: Floating or glue down.


Kember KemLam™ flooring is specially equipped with the European-designed KemLoc™ joint. The KemLoc™ joint system uses a unique tongue-and-groove joint that is able to withstand the most extreme pressure. Simply by "clicking" the joints together, planks are held firmly in place.

Application: Residential, Commercial, Retail, Office, and Rental

STAIR TREADS: KEMBER KREATIVE FLOORS™ offers custom-made stair treads.

STAIR NOSING: KEMBER KREATIVE FLOORS™ offers custom stair nosing.

FACTORY-FINISHED TRANSITION MOLDINGS Our hard surface floor-to-tile or carpet transitions provide a flush fit that eliminates unsightly trip hazards commonly found in other floating floor systems. This detail is unique to KEMBER floors.

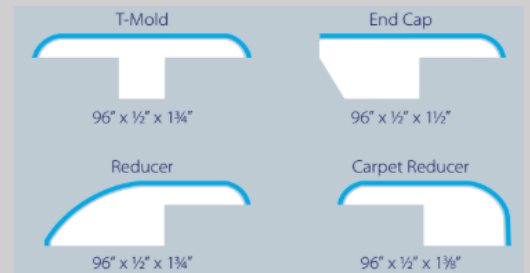

## MAINTENANCE

1. To prevent scratching the finish, sweep or vacuum floors often to eliminate abrasive dust and dirt.
2. Use of rugs in and outside of entranceways as well as high traffic areas (i.e. dishwasher, in front of sinks) will help prevent your floor from showing early signs of wear.
3. Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching of floors. Replace pads when needed.
4. Use only large, rubber or polyurethane castors. Caution: Plastic castors may potentially damage your floor.
5. When moving heavy furniture, don't compromise the finish of your flooring. Flip a mat or small rug over and place a smaller piece of plywood on top of rug. Place furniture carefully on top of plywood. Slide furniture safely and smoothly to its new location.

## CLEANING

Kember Kreative Floors<sup>™</sup> recommends the “Bona Hardwood Floor Care System” for cleaning

1. Sweep or vacuum floors to eliminate abrasive dust and dirt
2. Mist floor with Bona hardwood floor cleaner
3. Clean using the cleaning pad
4. Rinse cleaning pad as necessary, to avoid streaking

## DO NOT

1. Change the temperature of a subfloor radiant heat system by more than 5F (2.8C) per day when switching the system on and off.
2. Use wax, oil-based, or other household cleaning detergents on your floors. Never allow cleats on your floor, as they will damage the finish.