



KEMBER EPLANK™ is installed the same as 3/4" traditional solid floors with a nailed-down install, however KEMBER EPLANK™ reduces the amount of minor gapping between planks during seasonal changes resulting in a more stable installed floor. KEMBER EPLANK™ is produced in "random lengths", just like a solid wood floor.

| | | |
|----------------------------------|--|---|
| Species | Red Oak, White Oak, Maple, Walnut and Hickory. | |
| Relative Species Hardness | Red Oak 1,290lbs White Oak 1,360lbs Maple 1,450lbs Walnut 1,010 lbs | |
| Color | Oak – White Oak Natural, Armory, Chalk Canvas, Snowmass, Rift Pearl, NY Grey, Albany, Pewter, Graphite, Light Grey, Cobble, Almond, French White, Rift Antique. Maple – Graphite, Smoked, Driftwood, Antique, AE Brown. Walnut – Natural Hickory – Smoked, Graphite, AE Brown, Natural, Antique. *Custom colors are also available. | |
| Subfloor | Wood, concrete with or without a radiant heating system. | |
| Finishes | Semi-Gloss – 30%, Matte 10%, Extra Matte – 4-7% | |
| Application Standards | Surface Burning (ASTM E-84): FSI (Flame Spread Index) 100-150 Class C (depends on wood species) SD (Smoke Development) 75-400 (depends on wood species) | |
| | Surface Burning (ULC-S-102-2): FSV (Flame Spread Value) 100-150 (depends on wood species) SD (Smoke Development) 200-300 (depends on wood species) | |
| | Critical Radiant Flux (ASTM-E-648-94a): 0.25 to 0.40 watt/cm ² (depends on wood species) | |
| | R Value: R 0.3 to 0.4 (depends on wood species) | |
| LEED Credits | MRc1 | Within 500 miles (depends on site location) |
| | iEQc4.3 | Kember Eplank™ is FloorScore certified |

Specifications:

Random Lengths: 96"

Widths: 5", 6 1/4", 7", 8 1/8", 9 9/16", 10 1/4"

Thickness: 5/8"


Warranty: 50 Year Finish Warranty.

Relative humidity must be maintained between 25% - 60% or the warranty will be void.

Installation: Nailed or glue down.

Application: Residential, Light Commercial, Retail, Office, Rental.

FACTORY PRE-FINISHED STAIR TREADS AND NOSINGS, KEMBER KREATIVE FLOORS™ offers stair treads custom-produced in your dimensions, stained and finished to match your new KEMBER EPLANK™ wood flooring.

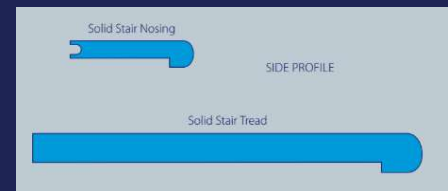

Cleaning

Kember Kreative Floors™ recommends the "Bona Hardwood Floor Care System" for cleaning

1. Sweep or vacuum floors to eliminate abrasive dust and dirt.
2. Mist floor with Bona hardwood floor cleaner
3. Clean using the cleaning pad
4. Rinse cleaning pad as necessary, to avoid streaking