



KEMBER KREATIVE FLOORS™ have created a premium laminate floor while continuing to introduce innovative technologies that retain your floor's desired look and performance. We offer a superior laminate, with an industry-leading warranty. KEMBER KEMPLAM™ raises the bar for other ordinary laminate floors. With our superior scratch and stain resistance, your laminate floors stay gorgeous for years.

Color		Oak – Mountain, Desert, Glacier, Toffee, Ranch, Saddle, French Lace, Charcoal, Pewter, Graphite, Grey Rift, Cobble, Sandstone, Aspen, Sun Bleached, Beach, Slate, French White, Antique, Smoked, Antique Rift. Other – Walnut, Dry Cedar, Cottage Wood *Custom colors are also available.
Subfloor		Wood, concrete, or radiant heating system.
Packaging		<div> 4" KemLam 25.8 (6')/ 23.02 (4')SqFt/Box 40lbs/Box 72 (6')/ 60 (4') boxes/Pallet Box: 72"x6"x4" Pallet: 6' x 4' x 4' / 4' x 4' x 4' </div> <div> 5.5" KemLam 34.09SqFt/Box 52lbs/Box 63 boxes/Pallet Box: 72" X 6" X 4" Pallet: 6' x 4' x 4' </div>
Application Standards		Coefficient of Static Friction (ASTM-D2047): 0.44-0.54 spread result
LEED Credits	MRc4	Kember KemLam™ is composed of 97% Post Industrial recycled content
	iEQc4.3	Kember KemLam™ is FloorScore certified

Cleaning

Kember Kreative Floors™ recommends the "Bona Hardwood Floor Care System" for cleaning

1. Sweep or vacuum floors to eliminate abrasive dust and dirt
2. Mist floor with Bona hardwood floor cleaner
3. Clean using the cleaning pad
4. Rinse cleaning pad as necessary, to avoid streaking

Specifications:

Random Lengths: 15" to 72"

Widths: 4" and 5.5"

Thickness: 5/16"

Warranty: 50 Year Finish Warranty.

Relative humidity must be maintained between 15% - 65% or the warranty will be void.


Installation: Floating or glue down. Kember KemLam™ flooring is specially equipped with the European-designed KemLoc™ joint. The KemLoc™ joint system uses a unique tongue-and-groove joint that is able to withstand the most extreme pressure. Simply by "clicking" the joints together, planks are held firmly in place.

Application: Residential, Light Commercial, Retail, Office, Rental.

STAIR TREADS, KEMBER KREATIVE FLOORS™ offers stair treads custom-produced in your dimensions.

STAIR NOSING, KEMBER KREATIVE FLOORS™ offers stair nosing that is custom molded in the corresponding thickness.

FACTORY-FINISHED TRANSITION MOLDINGS Our wood-to-tile or carpet transition provides a flush fit that eliminates an unsightly trip hazard commonly found on all other floating floor systems. This detail is unique to KEMBER laminate floors.

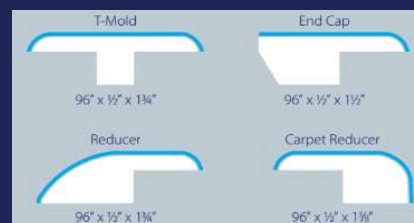

Maintenance:

1. To prevent scratching the finish, sweep or vacuum floors often to eliminate abrasive dust and dirt.
2. Mop up spills immediately to prevent floor from cupping.
3. Use of rugs in and outside of entranceways as well as high traffic areas (i.e. dishwasher, in front of sinks) will help prevent your floor from showing early signs of wear. Use rugs with mesh backings, which prevent humidity from being trapped underneath the rug.
4. Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching of floors. Replace pads when needed.
5. Use only large, rubber or polyurethane castors. Caution: Plastic castors may potentially damage your floor.
6. When moving heavy furniture, don't compromise the finish of your flooring. Flip a mat or small rug over and place a smaller piece of plywood on top of rug. Place furniture carefully on top of plywood. Slide furniture safely and smoothly to its new location.
7. Trim your pet's claws often, to avoid scratching of floors.
8. Kember Kreative Floors™ advises the use of curtains or blinds whenever possible to aid in the UV protection of your flooring.
9. Make sure to maintain a relative humidity level between 15% and 80%. High humidity causes buckling in your floor, and low humidity causes gapping between the floor and the shoe mold around the perimeter. Control the humidity with a dehumidifier and/or humidifier.

DO NOT

1. Never wet mop wood floors.
2. Never change the temperature of a subfloor radiant heat system by more than 5F (2.8C) per day when switching the system on and off.
3. Never use wax, oil-based, or other household cleaning detergents on your floors. Never allow high-heels or cleats on your floor, as they will damage the finish.