



KEMBER ECOKLIK™ engineered hardwood delivers the look of a solid wood floor, the performance of an engineered product and the ease of installation of a laminate click. We offer floating engineered single strip

random length flooring that is compliant to the variations in the level of your subfloor. KEMBER ECOKLIK™ is produced in “random lengths”, just like a solid wood floor.

Species	Maple, Red Oak, White Oak and Walnut.		
Relative Species Hardness	Walnut	1,010 lbs	
	Red Oak	1,290lbs	
	White Oak	1,360lbs	
	Maple	1,450lbs	
Color	Oak - White Oak Natural, Armory, Chalk Canvas, Snowmass, Rift Pearl, NY Grey, Albany, Pewter, Graphite, Light Grey, Cobble, 225E, French White, Rift Antique. Maple - AE Brown, Graphite, Smoked, Harvest. Walnut - Natural *Custom colors are also available.		
Subfloor	Wood, concrete, or radiant heating system.		
Packaging	4" Ecoklik 36.53SqFt/Box 59lbs/Box 60 boxes/Pallet Box: 84"x7"x4" Pallet: 7' x 4' x 4'	5" Ecoklik 33.91SqFt/Box 55lbs/Box 56 boxes/Pallet Box: 84" X 11" X 3" Pallet: 7' x 4' x 4'	6" Ecoklik 27.56SqFt/Box 46lbs/Box 60 boxes/Pallet Box: 84" X 7" X 4" Pallet: 7' x 4' x 4'
Finishes	Semi-Gloss – 30%, Matte 10%, Extreme Matte – 4-7%		
Application Standards	Surface Burning (ASTM E-84): FSI (Flame Spread Index) 100-150 Class C (depends on wood species) SD (Smoke Development) 75-400 (depends on wood species) Surface Burning (ULC-S-102-2): FSV (Flame Spread Value) 100-150 (depends on wood species) SD (Smoke Development) 200-300 (depends on wood species) Critical Radiant Flux (ASTM-E-648-94a): 0.25 to 0.40 watt/cm ² (depends on wood species) R Value: R 0.3 to 0.4 (depends on wood species)		
LEED Credits	MRc4	Kember EcoKlik™ is composed of 82% Post Industrial recycled content	
	iEQc4.3	Kember EcoKlik™ is FloorScore certified	

Cleaning

Kember Kreative Floors™ recommends the “Bona Hardwood Floor Care System” for cleaning

1. Sweep or vacuum floors to eliminate abrasive dust and dirt.
2. Mist floor with Bona hardwood floor cleaner
3. Clean using the cleaning pad
4. Rinse cleaning pad as necessary, to avoid streaking

Specifications:

Random Lengths: Up to 83"

Widths: 4", 5", 6", 7", 8 5/8"

Thickness: 3/8"

Warranty: 50 Year Finish Warranty.

Relative humidity must be maintained between 15% - 65% or the warranty will be void.

Installation: Floating and glue down.


Kember EcoKlik™ flooring is specially equipped with the European-designed KemLoc™ joint. The KemLoc™ joint system uses a unique tongue-and-groove joint that is able to withstand the most extreme pressure. Simply by "clicking" the joints together, planks are held firmly in place.

Application: Residential, Light Commercial, Retail, Office, Rental.

FACTORY PRE-FINISHED STAIR TREADS KEMBER KREATIVE FLOORS™ offers stair treads custom-produced in your dimensions, stained and finished to match your new KEMBER KREATIVE FLOORS™ wood flooring.

FACTORY PRE-FINISHED STAIR NOSING KEMBER KREATIVE FLOORS™ offers stair nosing that is custom molded in the corresponding thickness then stained and pre-finished to match your new KEMBER ECOKLIK™ wood flooring.

FACTORY-FINISHED TRANSITION MOLDINGS Our wood-to-tile or carpet transition provides a flush fit that eliminates an unsightly trip hazard commonly found on all other floating floor systems. This detail is unique to KEMBER engineered floors.

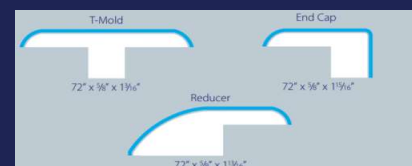

Maintenance:

1. To prevent scratching the finish, sweep or vacuum floors often to eliminate abrasive dust and dirt.
2. Mop up spills immediately to prevent floor from cupping.
3. Use of rugs in and outside of entranceways as well as high traffic areas (i.e. dishwasher, in front of sinks) will help prevent your floor from showing early signs of wear. Use rugs with mesh backings, which prevent humidity from being trapped underneath the rug.
4. Securely fasten felt pads to the bottom of furniture legs or feet, to prevent scratching of floors. Replace pads when needed.
5. Use only large, rubber or polyurethane castors. Caution: Plastic castors may potentially damage your floor.
6. When moving heavy furniture, don't compromise the finish of your flooring. Flip a mat or small rug over and place a smaller piece of plywood on top of rug. Place furniture carefully on top of plywood. Slide furniture safely and smoothly to its new location.
7. Trim your pet's claws often, to avoid scratching of floors.
8. Kember Kreative Floors[™] advises the use of curtains or blinds whenever possible to aid in the UV protection of your flooring.
9. Make sure to maintain a relative humidity level between 15% and 80%. High humidity causes buckling in your floor, and low humidity causes gapping between the floor and the shoe mold around the perimeter. Control the humidity with a dehumidifier and/or humidifier.

DO NOT

1. Never wet mop wood floors.
2. Never change the temperature of a subfloor radiant heat system by more than 5F (2.8C) per day when switching the system on and off.
3. Never use wax, oil-based, or other household cleaning detergents on your floors. Never allow high-heels or cleats on your floor, as they will damage the finish.